

# UcD180™

HG series



Avoid physical damage and electrostatic discharge to this device.

## General Description.

The UcD180HG is a state-of-the-art full-range amplifier-module based on high-end UCD-technology. The module can be remotely switched On/Off and is small, lightweight and will fit into any of your applications:


- Active monitoring systems.
- Professional high-end audio.
- DIY-projects.
- Active Public Address systems.
- Active subwoofers.

In the UcD180HG you will find a small, powerful and reliable amplifier for all your pure amplification needs.

## Features.

- 180W/4Ω, 105W/8Ω.
- 0.01% < THD+N < 0.02% 50W/8Ω 10Hz < f < 20kHz.
- Power Bandwidth 10Hz < f < 20kHz ±0.5dB.
- Input impedance 100kΩ.
- Output impedance 0.01Ω.
- Stand-by mode (stand-by power < 3W).
- Differential input.
- Active current-limiter.
- Pop-free stop/start mode.
- Voltage gain: 26dB.
- Load-independent bandwidth.
- Efficiency > 90%.
- Dimensions 65mm x 65mm x 31mm. Weighs only 95g.
- HxR12 Hypex Regulator ready.

## Connection Diagram.

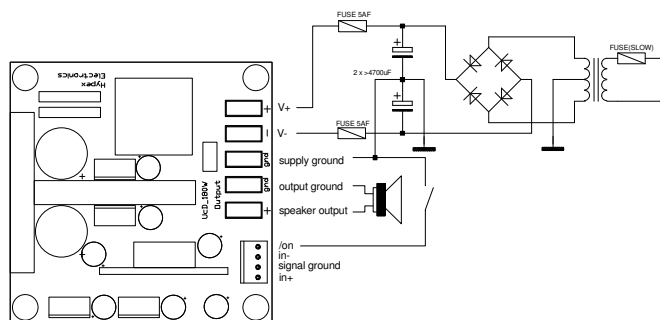

## Cooling.

Although Hypex UcD modules are based on very efficient Class-D technology, additional cooling is a must. Mounting the modules on a sheet of aluminium will provide enough cooling for use under normal conditions. When the module is used in a closed case, provide enough airflow by means of ventilation slots etc. When using high supply voltages it is better to turn the module 90° for better airflow at both sides of the circuit board.

## Absolute Maximum Ratings.

Connection	Description	Max
V+	Positive supply voltage	+ 50V
V-	Negative supply voltage	- 50V
(Over voltage protection is set at 52V)		

Absolute maximum ratings indicate limits beyond which damage may occur.



**WARNING:** These voltages can be potentially hazardous.

## Operating Conditions For Optimum Sonic Performance.

Connection	Description	Min	Max
V+	Positive supply voltage	+ 30V	+ 45V
V-	Negative supply voltage	- 30V	- 45V
GND	Supply ground		
LS-	Output ground		
LS+	Speaker output		
/ON	On (internal pull-up)		
IN-	Negative signal input		
GND	Signal ground		
IN+	Positive signal input		

1) Reversing supply voltage polarity will damage the amplifier beyond repair.

2) In case of an un-balanced source: connect **IN-** to signal-ground at the signal-source.